



## DATASHEET

Part No – EG-2835-053V-XX

Description - 2835 LED



**RoHS**  
compliant



LED light source  
maintenance test  
**ENERGYSTAR**

**EYE**

蓝光危害认证  
EN62471/IEC TR 62778

# EG-2835-053V-XX-XXX Datasheet



## FEATURES


- Plcc-2 Package
- Top View White Led
- Wide Viewing Angle
- Rohs Compliant
- Package: 17000pcs/reel



## APPLICATION

- General lighting
- Optical indicator
- Switch Lights
- Decorative and Entertainment Lighting

## Package Dimensions

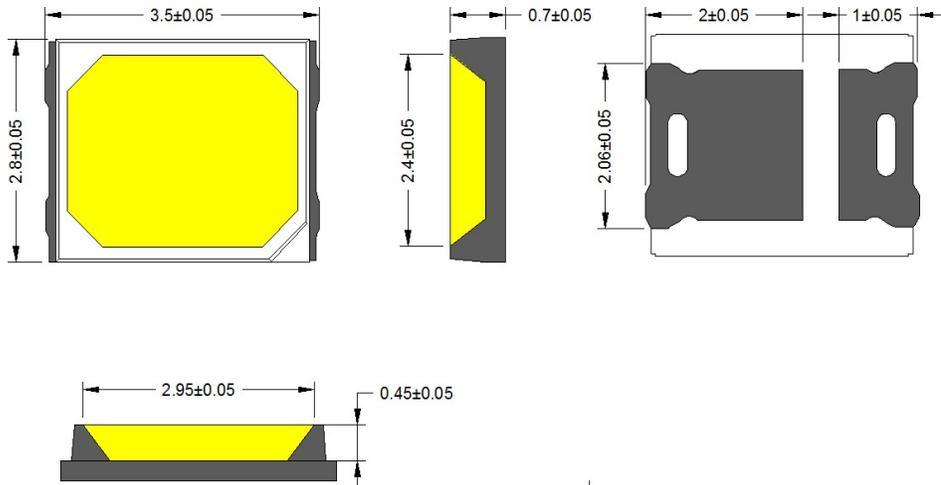

### Notes:

1. All dimensions in millimeters.
2. Thickness tolerance of copper plate is  $\pm 0.02$ mm.
3. Thickness tolerance of product is  $\pm 0.05$ mm.
4. Tolerance is  $\pm 0.1$ mm unless otherwise noted.

**ABSOLUTE MAXIMUM RATINGS**

Item	Symbol	Rating	Unit
Forward current	$I_F$	150	mA
Peak Forward Current <sup>[1]</sup>	$I_{F(Peak)}$	180	mA
Storage Temperature	$T_{stg}$	-40~+105	°C
Operating Temperature	$T_{opr}$	-30~+105	°C
Soldering Temperature	$T_s$	/	°C
Junction Temperature	$T_j$	125	°C
ESD Sensitivity	ESD	2000V HBM	V
Lead Soldering Temperature	$T_{SOL}$	Max. 350°C for 5 sec	°C

\*1) These or any other conditions beyond those indicated under recommended operating conditions may cause permanent damages to the device .


\*2) D. C. Current :  $T_j = T_c + R_{th\ j-s} \times P$  ;  $T_j = T_c + R_{th\ j-s} \times P$

**CHARACTERISTICS (T<sub>j</sub>=25°C)**

Items	Symbol	CCT	Min	Avg	Max	Unit
L1 Luminous Flux	$\Phi_v$	3000	60	~	65	LM
		4000	65	~	70	LM
		5700	65	~	70	LM
		6500	65	~	70	LM
		7500	65	~	70	LM
Items	Symbol	CCT	Min	Avg	Max	Unit
L2 Luminous Flux	$\Phi_v$	3000	65	~	70	LM
		4000	70	~	75	LM
		5700	70	~	75	LM
		6500	70	~	75	LM
		7500	70	~	75	LM
Forward Voltage	V <sub>f</sub>	I <sub>f</sub> =150mA	2.9	~	3.2	V
Color Rendering Index	R <sub>a</sub>	I <sub>f</sub> =150mA	/	--	--	--
Viewing Angle	2 $\theta$ <sub>1/2</sub>	I <sub>f</sub> =150mA	--	120	--	°
Thermal Resistance	R <sub>th j-s</sub>		--	22	--	°C/W
Reverse Leakage Current	I <sub>r</sub>	-	/	/	5	μA

\*These values are measured by the GS Everfine Hass2000 optical spectrum analyzer within the following tolerances: Hass2000 Luminous Flux ( $\Phi_v$ ) : ±5%, Forward Voltage (V<sub>f</sub>) : ±0.1, X/Y : ±0.005, CRI Value : ±2 ±5%, ±0.1, X/Y : ±0.005, ±2



CHROMATICITY BINS

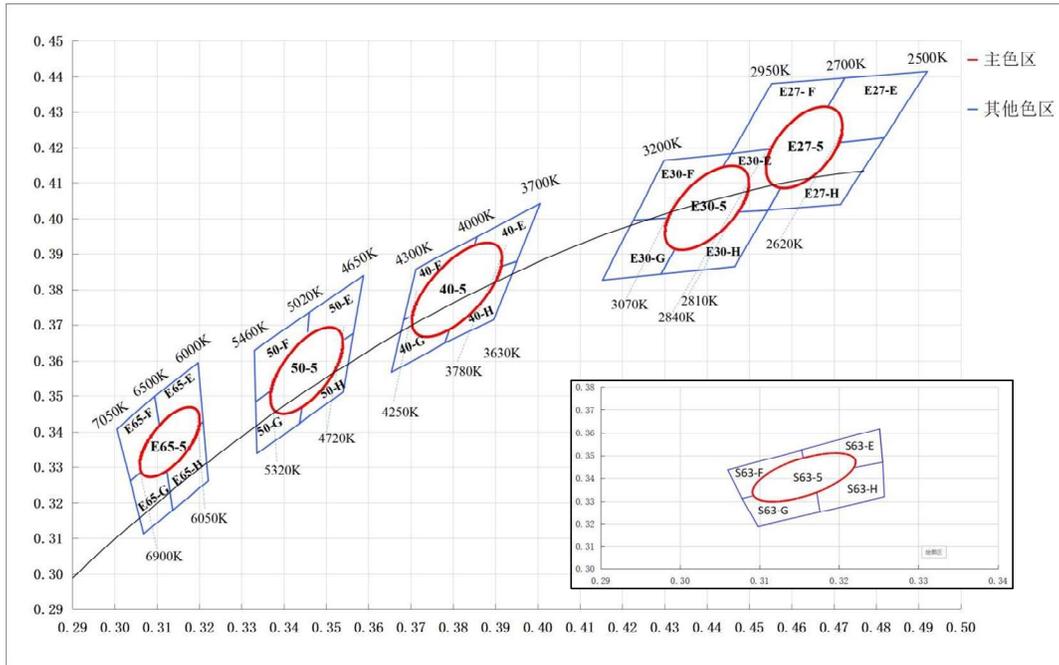



Oain color BIN	x	y	a	b	$\theta$	SDCO	Refer to CCT	
E65 - 5	0.3130	0.3370	0.00 <sup>2</sup> 3	0.00095	58.38	5	6 <sup>2</sup> 00 - 6700K	
Other color BIN	X1	y1	X <sup>2</sup>	y <sup>2</sup>	X3	y3	X4	y4
E65 - E	0.3116	0.3338	0.3094	0.3499	0.3197	0.3595	0.3 <sup>2</sup> 09	0.34 <sup>2</sup> 8
E65 - E	0.3037	0.3 <sup>2</sup> 61	0.3005	0.3408	0.3094	0.3499	0.3116	0.3338
E65 - G	0.3068	0.3113	0.3037	0.3 <sup>2</sup> 61	0.3116	0.3338	0.3137	0.3180
E65 - H	0.3137	0.3180	0.3116	0.3338	0.3 <sup>2</sup> 09	0.34 <sup>2</sup> 8	0.3 <sup>2</sup> 1	0.3 <sup>2</sup> 61
Oain color BIN	x	y	a	b	$\theta$	SDCO	Refer to CCT	
50 - 5	0.3454	0.357 <sup>2</sup>	0.00 <sup>2</sup> 74	0.00118	59.6 <sup>2</sup>	5	4800 - 5 <sup>2</sup> 00K	
Other color BIN	X1	y1	X <sup>2</sup>	y <sup>2</sup>	X3	y3	X4	y4
50 - E	0.3449	0.3581	0.3460	0.3736	0.3588	0.3841	0.3564	0.3676
50 - E	0.3333	0.3484	0.3330	0.36 <sup>2</sup> 9	0.3460	0.3736	0.3449	0.3581
50 - G	0.3333	0.3484	0.3336	0.3339	0.3437	0.34 <sup>2</sup> 4	0.3449	0.3581
50 - H	0.3437	0.34 <sup>2</sup> 4	0.3449	0.3581	0.3564	0.3676	0.3540	0.3511
Oain color BIN	x	y	a	b	$\theta$	SDCO	Refer to CCT	
40 - 5	0.3809	0.3799	0.00313	0.00134	54.00	5	3800 - 4 <sup>2</sup> 00K	
Other color BIN	X1	y1	X <sup>2</sup>	y <sup>2</sup>	X3	y3	X4	y4
40 - E	0.3818	0.3793	0.3857	0.3949	0.4006	0.4044	0.3951	0.3880
40 - E	0.3683	0.3714	0.371 <sup>2</sup>	0.3859	0.3857	0.3949	0.3818	0.3793
40 - G	0.3654	0.3568	0.3683	0.3714	0.3818	0.3793	0.3780	0.3649
40 - H	0.3780	0.3649	0.3818	0.3793	0.3951	0.3880	0.3896	0.3715
Oain color BIN	x	y	a	b	$\theta$	SDCO	Refer to CCT	
E30 - 5	0.4400	0.4030	0.00 <sup>2</sup> 78	0.00136	53.17	5	4850 - 3050K	
Other color BIN	X1	y1	X <sup>2</sup>	y <sup>2</sup>	X3	y3	X4	y4
E30 - E	0.437 <sup>2</sup>	0.4009	0.4457	0.4183	0.463 <sup>2</sup>	0.4 <sup>2</sup> 05	0.4544	0.40 <sup>2</sup> 4
E30 - E	0.4 <sup>2</sup> 6	0.3996	0.4 <sup>2</sup> 99	0.4164	0.4457	0.4183	0.437 <sup>2</sup>	0.4009
E30 - G	0.4153	0.38 <sup>2</sup> 8	0.4 <sup>2</sup> 6	0.3996	0.437 <sup>2</sup>	0.4009	0.4 <sup>2</sup> 91	0.3845
E30 - H	0.4 <sup>2</sup> 91	0.3845	0.437 <sup>2</sup>	0.4009	0.4544	0.40 <sup>2</sup> 4	0.4466	0.3866
Oain color BIN	x	y	a	b	$\theta$	SDCO	Refer to CCT	
E <sup>2</sup> 7 - 5	0.4630	0.4 <sup>2</sup> 00	0.00 <sup>2</sup> 58	0.00137	57. <sup>2</sup> 8	5	2650 - 2800K	
Other color BIN	X1	y1	X <sup>2</sup>	y <sup>2</sup>	X3	y3	X4	y4
E <sup>2</sup> 7 - E	0.463 <sup>2</sup>	0.4 <sup>2</sup> 05	0.47 <sup>2</sup> 6	0.4396	0.49 <sup>2</sup> 1	0.4415	0.4819	0.4 <sup>2</sup> 8
E <sup>2</sup> 7 - E	0.4457	0.4183	0.4553	0.438	0.47 <sup>2</sup> 6	0.4396	0.463 <sup>2</sup>	0.4 <sup>2</sup> 05
E <sup>2</sup> 7 - G	0.437 <sup>2</sup>	0.4009	0.4457	0.4183	0.463 <sup>2</sup>	0.4 <sup>2</sup> 05	0.4544	0.40 <sup>2</sup> 4
E <sup>2</sup> 7 - H	0.4544	0.40 <sup>2</sup> 5	0.463 <sup>2</sup>	0.4 <sup>2</sup> 05	0.4819	0.4 <sup>2</sup> 8	0.4716	0.4041
Oain color BIN	x	y	a	b	$\theta$	SDCO	Refer to CCT	
S63 - 5	0.3156	0.3405	0.00 <sup>2</sup> 3	0.00095	65	5	5950 - 6650K	
Other color BIN	X1	y1	X <sup>2</sup>	y <sup>2</sup>	X3	y3	X4	y4
S63 - E	0.3154	0.3399	0.3 <sup>2</sup> 45	0.3479	0.3 <sup>2</sup> 41	0.36 <sup>2</sup> 8	0.3143	0.3534
S63 - E	0.3154	0.3399	0.3143	0.3534	0.3050	0.3445	0.3068	0.33 <sup>2</sup> 2
S63 - G	0.3154	0.3399	0.3068	0.33 <sup>2</sup> 2	0.3088	0.3199	0.3166	0.3 <sup>2</sup> 63
S63 - H	0.3154	0.3399	0.3166	0.3 <sup>2</sup> 63	0.3 <sup>2</sup> 47	0.3330	0.3 <sup>2</sup> 45	0.3479

## Typical Characteristic Curves



### Forward Current Characteristics 正向电压与正向电流特性曲线

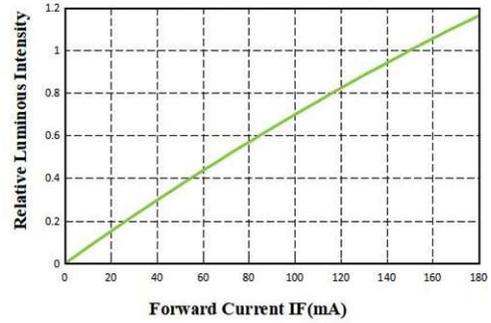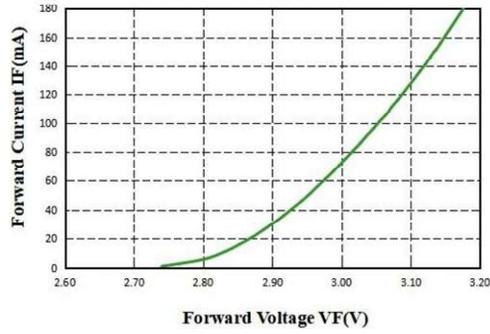

### Temperature Characteristics

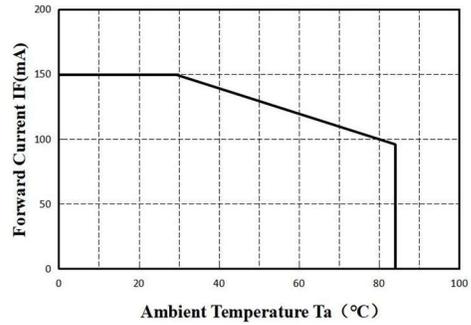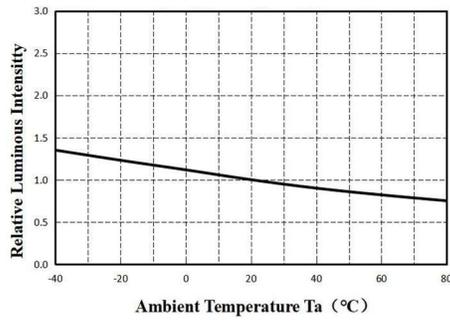

### Derating Curve

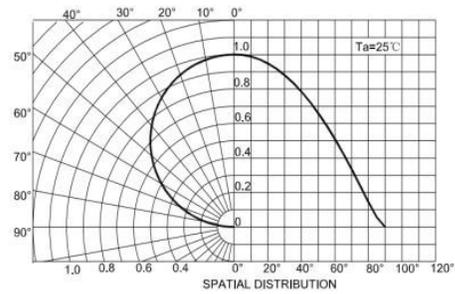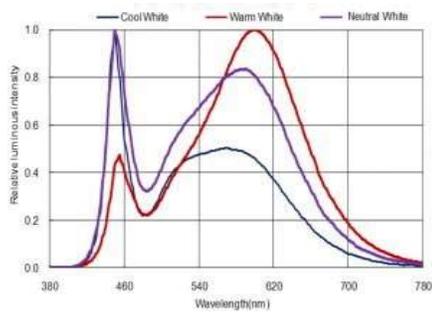

### Max Driving Forward Current vs. Soldering Temp

## Reliability Test Item and Conditions


### Failure Criteria

Items	Symbols	Test Conditions	Min	Max
Forward Voltage	V <sub>f</sub>	I <sub>f</sub> =Typical Current	--	Initial Value*1.1
Luminous Flux	Φ <sub>v</sub>	I <sub>f</sub> =Typical Current	Initial Value*0.7	--

### Reliability Test


Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
Room Temperature Operating Life	T <sub>a</sub> =25°C I <sub>f</sub> =Typical Current (DC)	1000hrs	22pcs	0/1
High Temperature Operating Life	T <sub>a</sub> =85°C I <sub>f</sub> =Typical Current (DC)	1000hrs	22pcs	0/1
Wet High Temperature Operating Life	T <sub>a</sub> =85°C&85%RH I <sub>f</sub> =Typical Current (DC)	168hrs	22pcs	0/1
Low Temperature Operating Life	T <sub>a</sub> =-30°C	1000hrs	22pcs	0/1
High Temperature Storage Life	T <sub>a</sub> =85°C	1000hrs	22pcs	0/1
Low Temperature Storage Life	T <sub>a</sub> =-40°C	1000hrs	22pcs	0/1
Temperature Cycle	H:+100°C 30min- 5min-L:-40°C 30min	200cycles	22pcs	0/1
Thermal Shock	H:+100°C 15min- 30sec-L:-40°C 15min	200cycles	22pcs	0/1
Reflow Soldering	260°C 10sec	3cycles	22pcs	0/1

**Packing Standard**

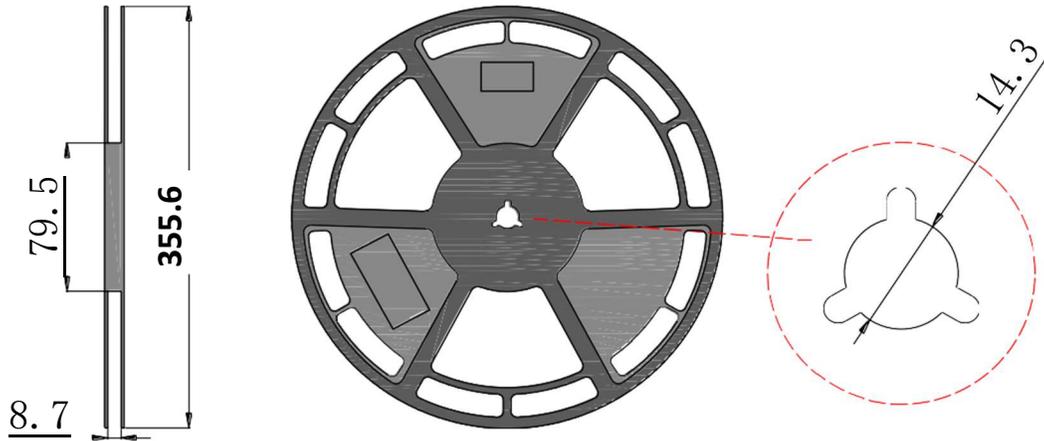

**Reel  
Tape**

**Polarity  
Direction**

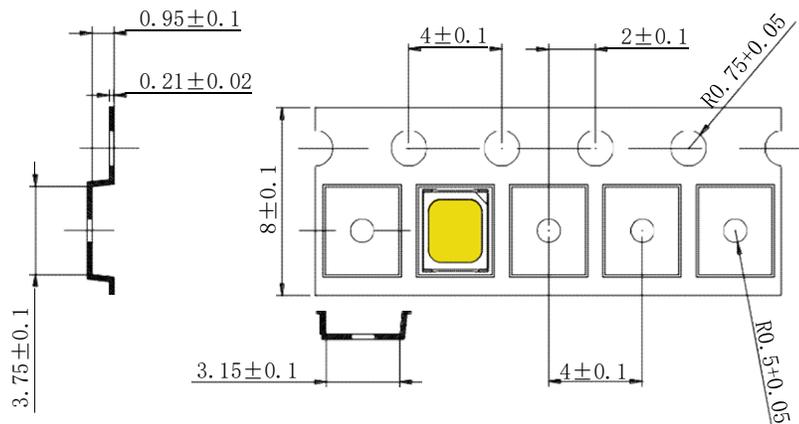

**Remarks:**

1. The material of the reel is PS (black), and the material of the cover tape is PET (transparent)
2. The unmarked tolerance is  $\pm 1.0$ ;
3. When the products are out of the warehouse, they are packaged with carrier tapes, put into aluminum foil bags, and vacuum-sealed with desiccant. Each carrier is packed with LEDs. The number of lamp beads is 20,000 pcs. When using, please confirm that the aluminum foil bag is not leaking and the carrier tape is not cracked.

## PRECAUTION FOR USE

- (1) This device should not be used in any type of fluid such as water, oil, organic solvent, etc. When washing is required, IPA should be used.
- (2) When the LEDs are illuminating, operating current should be decided after considering the ambient maximum temperature.
- (3) LEDs must be stored to maintain a clean atmosphere. If the LEDs are stored for 3 months or more after being shipped from Everstar, a sealed container with a nitrogen atmosphere should be used for storage.
- (4) The LEDs must be used within seven days after opening the moisture proof packing. Repack unused Products with anti-moisture packing, fold to close any opening and then store in a dry place.
- (5) The appearance and specifications of the product may be modified for improvement without notice.
- (6) This LED is sensitive to the static electricity and surge. It is recommended to use a wrist Band or anti-electrostatic glove when handling the LEDs.
- (7) On manual soldering, a solder tip must be needed as grounded for usage. If over voltage which exceeds the absolute maximum rating is applied to LEDs, it will cause damage LEDs and result in destruction. Damaged LEDs will show some unusual characteristics such as leak current remarkably increase, turn-on voltage becomes lower and the LEDs get unlighted at low current.